



Screw compressor TYPHON II

N/Pressure or SP/Suction and Pressure

The multitalent - 500 up to 1130 m³/hr -



TYPHON II-20R

1200 - 2000 rpm CW



TYPHON II-30R

1800 - 3000 rpm CW



Dimension :

L 664 x H 362 x W 280 mm

Weight :

143 kg

The solution for an optimum mounting
inside truck frame.

TYPHON II-13R/15L

either 780 - 1300 rpm CW
or 900 - 1500 rpm CCW



TYPHON II-19R/22L

either 1170 - 1950 rpm CW
or 1320 - 2250 rpm CCW




Dimension :

L 799 x H 446 x W 295 mm

Weight :

173 kg

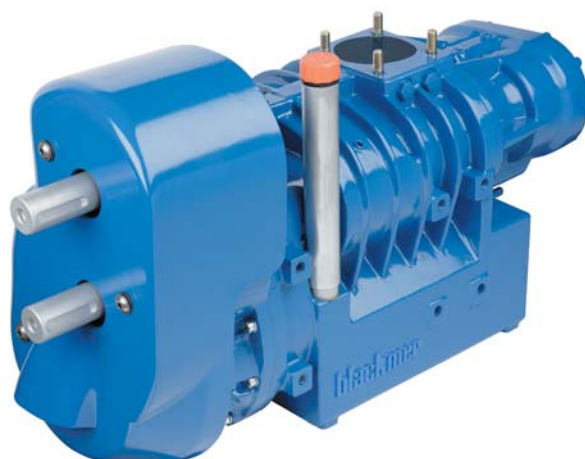



Screw compressor TYPHON II


Speed (rpm)

COMPRESSOR SPEED

VERSION	1	2	3	4	5
13R	780	910	1040	1170	1300
15L	900	1050	1200	1350	1500
19R	1170	1365	1560	1755	1950
20R	1200	1400	1600	1800	2000
22L	1320	1580	1800	2035	2250
30R	1800	2100	2400	2700	3000

Flow (m³/hr) / Power (kW)

Suction atm, 20°C

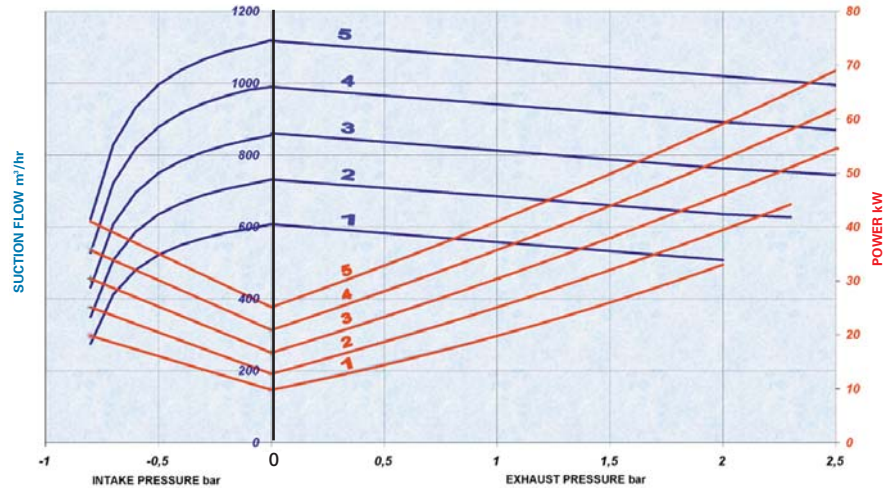

Torque / Pressure (Nm)


VERSION	PRESSURE (bar)*		
	1.5	2.0	2.5
13R	370	430	510
15L	320	380	440
19R	250	300	350
20R	240	280	330
22L	220	260	300
30R	160	190	220

*At full speed


Torque / Suction (Nm)

Suction VERSION	-800 mbar
13R	308
15L	267
19R	211
20R	200
22L	182
30R	133

TYPHON II COMPRESSOR 20R and 30R

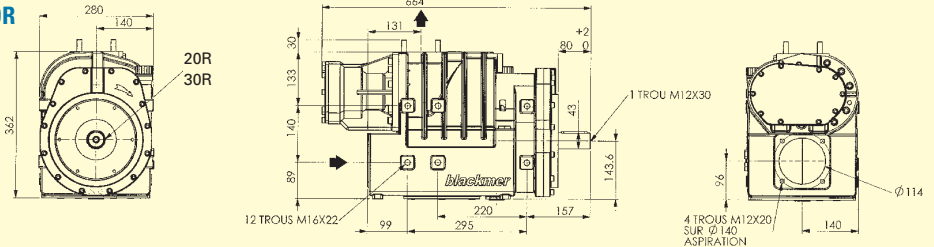

TYPHON II COMPRESSOR WITH MULTIPLIER 13R/15L and 19R/22L

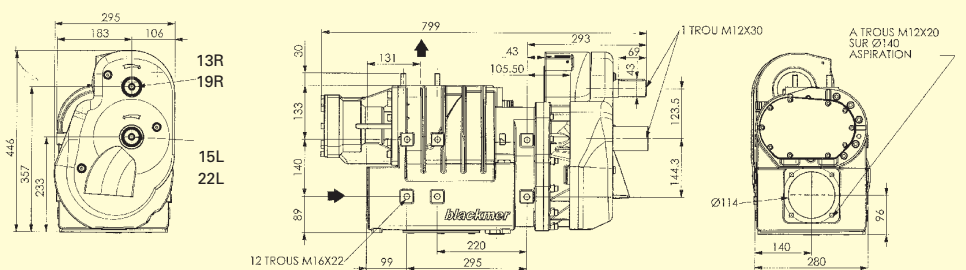

Distributed by :

Mouvex - Blackmer

ZI la Plaine des Isles, rue des Cailottes 89000 Auxerre, FRANCE • T +33.3.86.49.86.30 F +33.3.86.46.42.10
contact@mouvex.com

Blackmer reserves the right to modify the information and illustrations contained in this document without prior notice.
This is a non-contractual document.
Printed in FRANCE by Filigrane

© 2008 Blackmer